

 **ANCHOR**
by **Panasonic**

STYLISH RELIABLE INNOVATIVE

COMPLETE WATER HEATER RANGE
FOR YOUR MODERN BATH SPACE



Mini Catalogue - July 2023

Calisto

STORAGE WATER HEATER

PERFORMANCE SERIES



5 STAR RATING



GLASSLINED INNER TANK



MAGNESIUM ANODE




GLASSLINED HEATING ELEMENT



MULTI FUNCTION SAFETY VALVE



SUITABLE FOR HIGH RISE BUILDING & PRESSURE PUMP APPLICATION



ADJUSTABLE THERMOSTAT



RUST PROOF BODY



IPX4 PROTECTION


CAPACITY	6L, 10L, 15L, 25L
MOUNTING TYPE	VERTICAL
DEGREE OF PROTECTION HUMIDITY	IPX 4
POWER (WATTS)	2000
WORKING PRESSURE	0.8 Mpa
PRODUCT DIMENSIONS (6L)	315 x 315 x 278 (HxWxD) mm
PRODUCT DIMENSIONS (10L)	365 x 365 x 293 (HxWxD) mm
PRODUCT DIMENSIONS (15L)	395 x 395 x 338 (HxWxD) mm
PRODUCT DIMENSIONS (25L)	445 x 445 x 383 (HxWxD) mm



ASTRA

PERFORMANCE SERIES

INSTANTANEOUS WATER HEATER



STAINLESS
STEEL TANK




RUST PROOF
BODY



NICKEL COATED
COPPER
HEATING ELEMENT



MULTI FUNCTION
SAFETY VALVE



HIGH PRECISION
PRECALIBRATED
THERMOSTAT



PRESET THERMAL
CUTOFF



FIRE RETARDANT
POWER CORD



IPX4
PROTECTION

IS:8978



CM/L-9512427115

CAPACITY	3L
POWER (WATTS)	3000
WORKING PRESSURE	0.65 Mpa
PRODUCT DIMENSIONS (3L)	366 X 221.6 X 197.5 (HXWXD) mm



Rivia+

STORAGE WATER HEATER


VALUE SERIES



5 STAR
RATING



GLASS LINED
INNER TANK



MAGNESIUM
ANODE




NICKEL COATED
COPPER
HEATING ELEMENT



MULTI FUNCTION
SAFETY VALVE



SUITABLE FOR
HIGH RISE BUILDING &
PRESSURE PUMP
APPLICATION



ADJUSTABLE
THERMOSTAT



CAPACITY	6L, 10L, 15L, 25L
MOUNTING TYPE	VERTICAL
DEGREE OF PROTECTION HUMIDITY	IPX4
POWER (WATTS)	2000
WORKING PRESSURE	0.8 MPA
PRODUCT DIMENSION (6L)	Φ300 X 365 (DXH) mm
PRODUCT DIMENSION (10L)	Φ340 X 380 (DXH) mm
PRODUCT DIMENSION (15L)	Φ340 X 490 (DXH) mm
PRODUCT DIMENSION (25L)	Φ358 X 560 (DXH) mm



Rivia

STORAGE WATER HEATER

VALUE SERIES



5 STAR RATING



GLASSLINED INNER TANK



MAGNESIUM ANODE




NICKEL COATED COPPER HEATING ELEMENT



MULTI FUNCTION SAFETY VALVE



SUITABLE FOR HIGH RISE BUILDING & PRESSURE PUMP APPLICATION



ADJUSTABLE THERMOSTAT

CAPACITY	35L, 50L
MOUNTINGTYPE	VERTICAL
DEGREE OF PROTECTION HUMIDITY	IPX 4
POWER (WATTS)	2000
WORKING PRESSURE	0.8 Mpa
PRODUCT DIMENSIONS (35L)	Ø401 X 567 (DXH) mm
PRODUCT DIMENSIONS (50L)	Ø401 X 765 (DXH) mm



TRISA

STORAGE WATER HEATER

VALUE SERIES



5 STAR
RATING



GLASSLINED
INNER TANK



MAGNESIUM
ANODE




NICKEL COATED
COPPER
HEATING ELEMENT



MULTI FUNCTION
SAFETY VALVE



SUITABLE FOR
HIGH RISE BUILDING &
PRESSURE PUMP
APPLICATION



ADJUSTABLE
THERMOSTAT



RUST PROOF
BODY



CAPACITY

6L, 10L, 15L, 25L, 35L

MOUNTING TYPE	VERTICAL
DEGREE OF PROTECTION HUMIDITY	IPX 4
POWER (WATTS)	2000
WORKING PRESSURE	0.8 Mpa
PRODUCT DIMENSIONS (6L)	Φ290 X 365 (DXH) mm
PRODUCT DIMENSIONS (10L)	Φ335 X 400 (DXH) mm
PRODUCT DIMENSIONS (15L)	Φ335 X 480 (DXH) mm
PRODUCT DIMENSIONS (25L)	Φ380 X 570 (DXH) mm
PRODUCT DIMENSIONS (35L)	Φ380 X 690 (DXH) mm



TRISA

STORAGE WATER HEATER

VALUE SERIES



3 STAR RATING



GLASSLINED INNER TANK



MAGNESIUM ANODE




NICKEL COATED COPPER HEATING ELEMENT



MULTI FUNCTION SAFETY VALVE




SUITABLE FOR HIGH RISE BUILDING & PRESSURE PUMP APPLICATION



ADJUSTABLE THERMOSTAT



RUST PROOF BODY

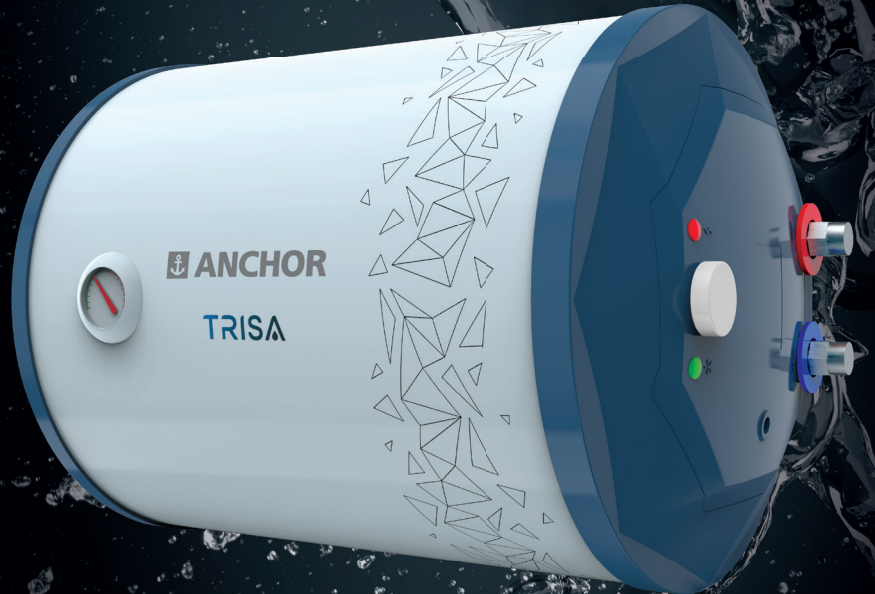

CAPACITY

10L, 15L, 25L

MOUNTING TYPE	HORIZONTAL
DEGREE OF PROTECTION HUMIDITY	IPX 4
POWER (WATTS)	2000
WORKING PRESSURE	0.8 Mpa
PRODUCT DIMENSIONS (10L)	Φ335 X 400 (DXW) mm
PRODUCT DIMENSIONS (15L)	Φ335 X 480 (DXW) mm
PRODUCT DIMENSIONS (25L)	Φ380 X 690 (DXW) mm

* LHS & RHS AVAILABLE

2

YEARS WARRANTY PRODUCT

2

YEARS WARRANTY HEATING ELEMENT

5

YEARS WARRANTY INNER TANK

FREE INSTALLATION WITH 1.5 FT INLET OUTLET PIPES

VENICE

INSTANTANEOUS WATER HEATER

VALUE SERIES



STAINLESS
STEEL TANK




RUST PROOF
BODY



COPPER HEATING
ELEMENT



MULTI FUNCTION
SAFETY VALVE



HIGH PRECISION
PRECALIBRATED
THERMOSTAT



PRESET THERMAL
CUTOUT



FIRE RETARDANT
POWER CORD



IPX4
PROTECTION

IS:8978



CM/L-9100153605

CAPACITY	1L, 3L
POWER (WATTS)	3000/4500
WORKING PRESSURE	0.65 Mpa
PRODUCT DIMENSIONS (1L)	305 X 175 X 155 (HXWXD) mm
PRODUCT DIMENSIONS (3L)	347 X 203 X 185 (HXWXD) mm





REJUVENATE WITH
A SOOTHING SHOWER



DISCLAIMER :

- Images are for representation purpose and the actual product may vary
- The company reserves the right to change the specifications without any prior notice
- Due to continuous improvement, product specifications may vary
- Always use Anchor genuine spare parts and pipes
- Any dispute shall be subject to the exclusive jurisdiction of Thane courts
- Always get your installation done by the Authorized Anchor by Panasonic Service centre only

PANASONIC LIFE SOLUTIONS INDIA PVT. LTD.

Corporate & Head Office: 3rd Floor, B Wing, I-Think Techno Campus,
Pokharan Road No.2, Thane (W), Thane - 400 607, Maharashtra.

Tel. 022 4222 8888 | Fax. 022 4222 8884

Customer Care no.: 022-41304130 | WhatsApp: 9136028606

Email: wecare@in.panasonic.com | www.isin.panasonic.com

Registered Office: 12th Floor, Ambience Tower, Ambience Island,
NH-48, Gurugram - 122 002, Haryana.

Distributor / Dealer Stamp